

GE TUNGSRAM™



European Producer
Lighting Solutions

Innovation is our heritage

EST.1896

36
kWh/1000h

A
energy class

82
lumens/watt

T8 Polylux XLR™ - G13 Cap


OT FT8/30W/840/GE/SL1/25

93082422



Product information

Polylux XLR™ lamps should be the natural choice for all fluorescent lighting applications. The excellent colour reproduction flatters skin tones making people appear more natural, and makes merchandise appear more vibrant and colourful.

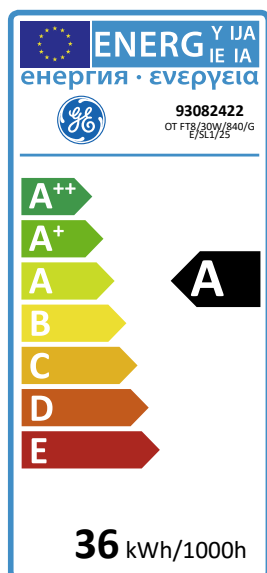

Product data

Product Code	93082422
Bulb Shape	Tubular
Bulb Finish	Coated
Regulatory comment	CE Certified
Bulb maximum overall diameter [mm]	28
Maximum Overall Length [mm]	908.8
Cap to Cap Length (Max) [mm]	894.6
Mercury Content [mg]	<3,5mg
RoHS compliant	Yes
Brand	GE Lighting
Cap/Base	G13

Performance data

Colour Code	840
Rated Lumens [lm]	2450
Weighted energy consumption [kWh/1000h]	36
Rated efficacy 25°C EM preheat	82
Energy efficiency class (EEC)	A
Rated lumen maintenance factor (2000 hours)	0.97
Rated lumen maintenance factor (4000 hours)	0.95
Rated lumen maintenance factor (6000 hours)	0.94
Rated lumen maintenance factor (8000 hours)	0.93
Rated lumen maintenance factor (12000 hours)	0.92
Rated lumen maintenance factor (16000 hours)	0.9
Rated lumen maintenance factor (20000 hours)	0.9
Operating mode for LSF and LLMF data	HF
Rated Life [h]	{EM 3-hour} : 15000
Rated survival factor (2000 hours)	1
Rated survival factor (4000 hours)	1
Rated survival factor (6000 hours)	0.99
Rated survival factor (8000 hours)	0.99
Rated survival factor (12000 hours)	0.98
Rated survival factor (16000 hours)	0.9
Rated survival factor (20000 hours)	0.5
Rated median life on electromagnetic (EM / CCG) ballast on IEC 12-hour cycle	18000
Rated median life on electronic (HF / ECG) ballast on IEC 12-hour cycle	23000
Rated median life on electronic (HF / ECG) ballast on IEC 3-hour cycle	20000
Nominal correlated colour temperature (CCT) [K]	4000
Nominal lumens [lm]	2450
Colour Rendering Index (CRI) [Ra]	80

Electrical data

Lamp Current [A]	0.365A
Design Lamp ambient temperature [°C]	25
Starting ambient temperature range	-15°C ...50°C
Dimming Capability	Yes
Nominal power [W]	30

Logistic data

Pack Quantity	25
Inner pack type	sleeve
Outer pack type	outer box
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[LFL Lamps Spectrum Catalogue \(EN\) \(PDF\)](#)

[LFL T8 Polylux XLR™ Data sheet \(EN\) \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)